

REMOTE INFRARED RECEIVER

Audio & Video



With the Remote Infrared (IR) Receiver, Vantage IR remote controls can send commands to the Main Controller. Each receiver accepts IR codes to prompt the control of lighting, audio/video, or any other component on the system.

Once the desired components are attached to the Vantage System, an IR Receiver can be programmed to recognize and respond to remote control commands within its zone. The total number of IR zones in a Design Center project is only limited by memory. In QLink, each Main Controller can support up to 50 unique IR zones. Each IR Zone supports up to 256 individual commands.


The Remote IR was designed to meet the style and design needs of any home. Using a simple tension spring, the IR receiver quickly mounts to any flat surface and can be painted to match the color of the room.




Product Highlights

- Attaches to the auxiliary input on the back of standard Vantage keypad stations as well as TheatrePoint or IRX, CIS, DIN Contact-Input Station and DIN Electronic Dimming Station
- Mounts without screws
- Compliments any décor with an ultra-slim, inconspicuous design
- Adapts to match any room by painting the trim
- Receives IR transmissions from multiple angles
- Installs up to 100 feet from the host keypad using 18 to 24 gauge wire


Remote Infrared Receiver

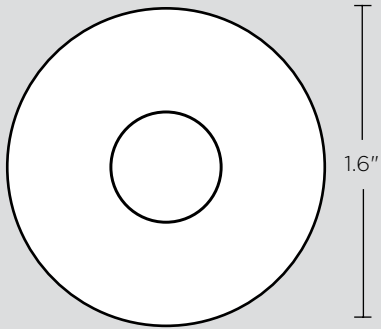

FRONT VIEW

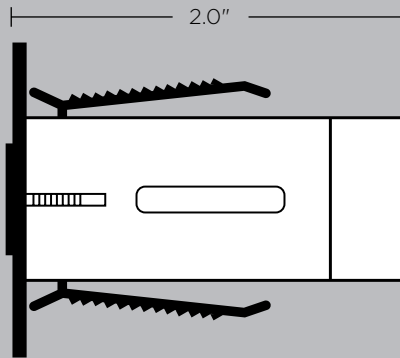

SIDE VIEW

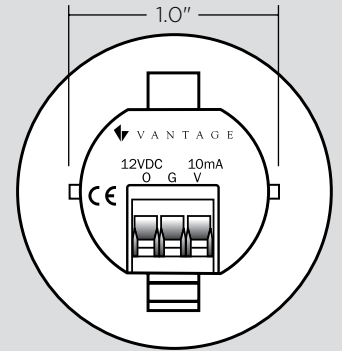

BACK VIEW

Specifications

Dimensions, HWD

1.6" x 1.6" x 2"
42mm x 42mm x 50mm

General Specifications

Model	REMOTEIR
Weight	0.9 oz. (25.5g)
Cutout Dimensions	19mm (.75")
Visible Dimensions	35.6 mm (1.4")
Operating Power	12VDC
Operating Temperature	0° to 55°C (32° to 131°F)
Built-in Ultraviolet Filter	Yes
Infrared Pass Through	None
Maximum Distance from Keypad	100 feet (30 meters)
Maximum Range	60 feet (18 meters)
Number per Controller	120 (one per keypad station)
Receiving Angle	60 degrees
Wire Type	3 wire, 18 to 24 gauge, unshielded

System Compatibility

InFusion
QLink