

TPT1210-1 IN-WALL DOCK

User Interfaces

The TPT1210-1 In-Wall dock is great for applications where an in-wall mount is more desirable. Vantage's TPT1210-1 In-Wall (TPT-1210-1-IW) allows the TPT1210-1 to be easily docked, flush with the wall. The dock provides full Ethernet hardwire connectivity and power to charge the touchscreen. The in-wall dock may be installed during construction or as a retrofit, mounting between the stud spaces.


For new construction, the optional TPT rough-in wall box (part number TPT1210-1-INSTALL-16) is also available. This product was designed for pre-construction installation and installs behind the drywall and uses telescoping brackets to attach firmly to the studs. This provides rigid stabilization to optimize a removable touchscreen application.




Product Highlights

- Elegant flush mounting solution
- Provides power for charging while docked
- Provides wired Ethernet while docked
- Frees your hands for navigation


TPT1210-1 In-Wall Mounting Dock

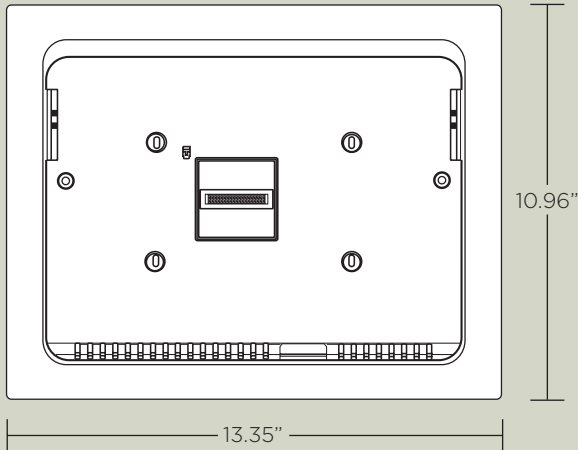

FRONT VIEW

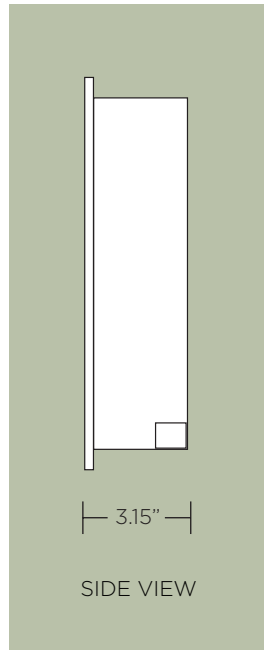

SIDE VIEW

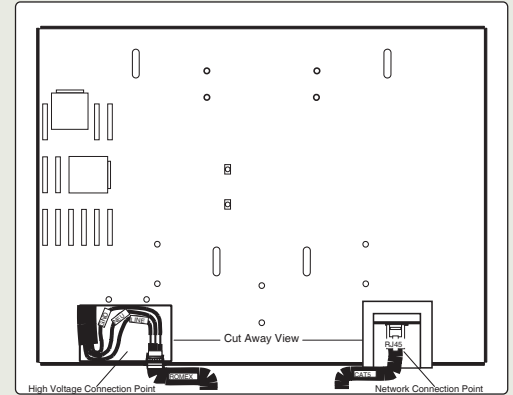

BACK VIEW

Specifications

Dimensions, HWD

Overall Dimensions, HWD	11" x 13.75" x 3.25" 279.4mm x 349.2mm x 82.6mm
Surface Dimensions, HWD	11" x 13.75" x 0.25" 279.4mm x 349.2mm x 6.4mm

General Specifications

Model	TPT1210-IW
Weight	8.0 lbs. - 3.6 kg
Retrofit Mounting	Mounts to two 16inch telescoping brackets (included)
Pre-Installation Mounting	Mounts to TPT1210-1-ROUGHIN-16 PLEASE SEE: TPT1210-1 Rough In Wall Box_install.pdf Installation sheet
Power Connection	Inside Electrical Box - 120/240V
Built-In AC Adapter	100-240V, AC 47-63Hz, 19V DC output, 3.16A 60W Adapter
Operating Temperature	5°C - 35°C (41° F - 95° F)
Ambient Operating Humidity	5-95% non-condensing

Mounting/Dismounting TPT1210


Mount	<ul style="list-style-type: none"> • Dock the 1210-1 tablet by inserting the bottom first into the self guiding cupped tray. • Carefully press back the top of the TPT1210-1 tablet to completely lock the docking clamps. • Make sure it is locked before leaving by sliding the lock lever on the top. • Press the tablet all the way back (until it bottoms) and then release to secure in the wall.
Remove	<ul style="list-style-type: none"> • Press the tablet all the way back (until it bottoms) and then release to allow the Floating Dock to release from the wall. • Unlock by sliding the lock lever on the top • Remove the TPT1210-1 by pressing in either the left or right side levers and carefully tilting the top of the TPT1210-1 away from the wall while leaving the bottom securely in the cupped tray. • Finish by carefully lifting the 1210-1 from the tray.

System Compatibility


InFusion

TPT1210-1 In-Wall Mounting Dock


Bezel Options

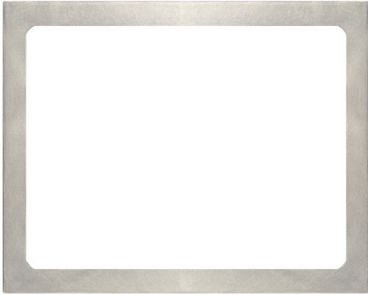

Silver

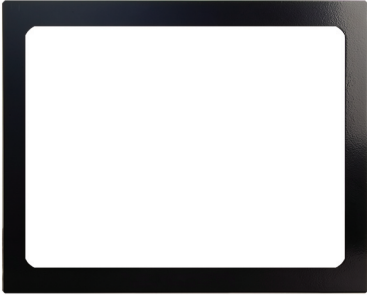

Black

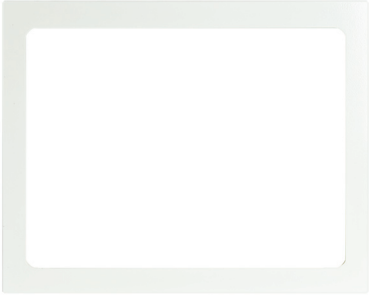

White