

TPT1210-1 WEB TABLET

User Interfaces

cs ug

The TPT1210-1 is a completely customizable hand-held touchscreen that provides the homeowner with complete wireless control of their Vantage System. This 12.1-inch, wide-angle color touch panel is ideal for any environment.

Utilizing the simple drag and drop programming of Vantage's powerful software the TPT1210-1 can be personalized to cater to the homeowner's individual tastes. Using preprogrammed libraries and widgets as well as other design elements, Vantage dealers can quickly create complex and attractive touchscreen solutions. With its optional in-wall, on-wall, or pedestal mount, the TPT1210-1 will enhance the look of any room.



The TPT1210-1 offers total control of any project by not only controlling the lights, but also climate, security cameras, multi-room audio, home theaters and more.



Product Highlights

- Provides 100% design customization through Vantage's Design Center software
- Powered by Infusion Media
- Intel® Celeron®M - ULV 423
- 1024 x 768 resolution with an ultra slim 12.1" wide angle view XGA panel
- Rechargeable 6-cell 42w lithium ion battery pack
- Built-in speakers and microphone
- Intel® Pro 3945 Dual-Band/Tri-Mode 802.11 a/b/g
- Finger Print Reader

TPT1210-1 WEB TABLET

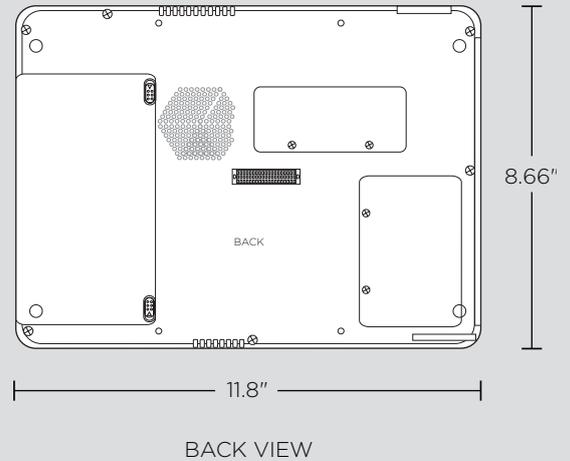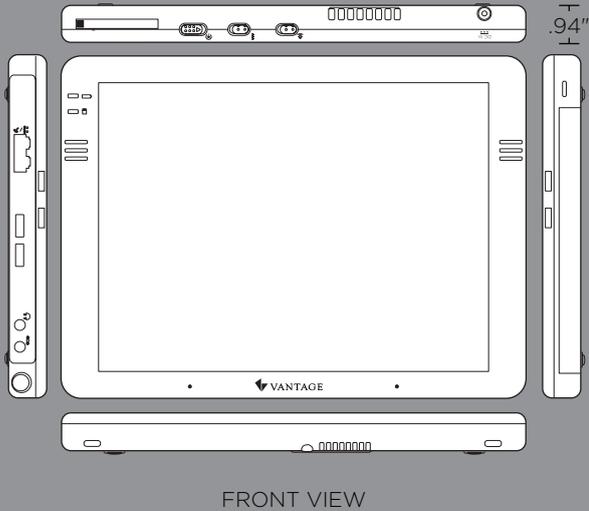

Specifications

Dimensions, HWD

11.81" x 8.66" x 1.02"
300mm x 220mm x 26mm

General Specifications

Model	TPT1210-1
Weight	3.57 lbs (1.62kg) with Battery Pack Installed
AC Adapter	100-240V, AC 47-63Hz, 20V DC output, 3.25A 65W
Audio Chip	Intel® High Definition Audio Interface (ICH7-M)
Battery	Rechargeable 6-Cell Lithium Ion Smart Battery Pack (3800 mAh @ 11.1 V, 42W/hr)
Video	Intel® GMA 950 PCI Express, 250 MHz Core Render Clock at 1.05V core 1024 x 768 Landscape
Certification	UL, CSA, TUV,CCC,EMI FCC, CE, VCCI,C-Tick
Communication	1x RJ-11 56Kbps v.90 Fax/Modem 1x RJ-45 10/100/1000 Mbps Full Duplex Ethernet 1x Intel® Pro 3945 Dual-Band/Tri-Mode 802.11 a/b/g
Display	12.1" TFT XGA LCD Wide Angle Display Passive Resistive Touch Screen
Processor	Intel® Celeron® M ULV 423; 1.06 GHz, 32KB/32KB L1 cache, 1 MB L2 cache, 533 MHz FSB; Intel Enhanced SpeedStep® Technology
Expansion Slot	PCMCIA 2.1 Compliant, Supports one (1) Type II 32-bit PC Card Bus
Graphics	Intel® 945 GM Express North Bridge with 533 MHz and 667 MHz
Hard Drive	2.5" 9.5 mm, Ultra DMA SATA 150 MB/s 60 GB @ 5,400 rpm
I/O Ports	1x RJ-11 56Kbps v.90 Fax/Modem; 1x RJ-45 10/100/1000 Ethernet; 2x USB 2.0; 1x 3.5mm Audio Out; 1x 3.5mm Audio In
Memory	2x SODIMM DDR2 slots with initial configurations of 1.0 GB
Operating System	Windows® XP Professional Edition
Operating Temperature	Temperature: 5°C - 35°C (41°F - 95°F) Humidity: 20% - 80% (no condensation)
Speakers/Mic	Built-in Stereo Speakers and Dual Digital Microphone Array for added fidelity and accuracy

System Compatibility

InFusion